


## Panel Repairing Line R7

**UNCOMPROMISED REPAIRING  
CAPACITY FOR MOST DEMANDING  
NEEDS**

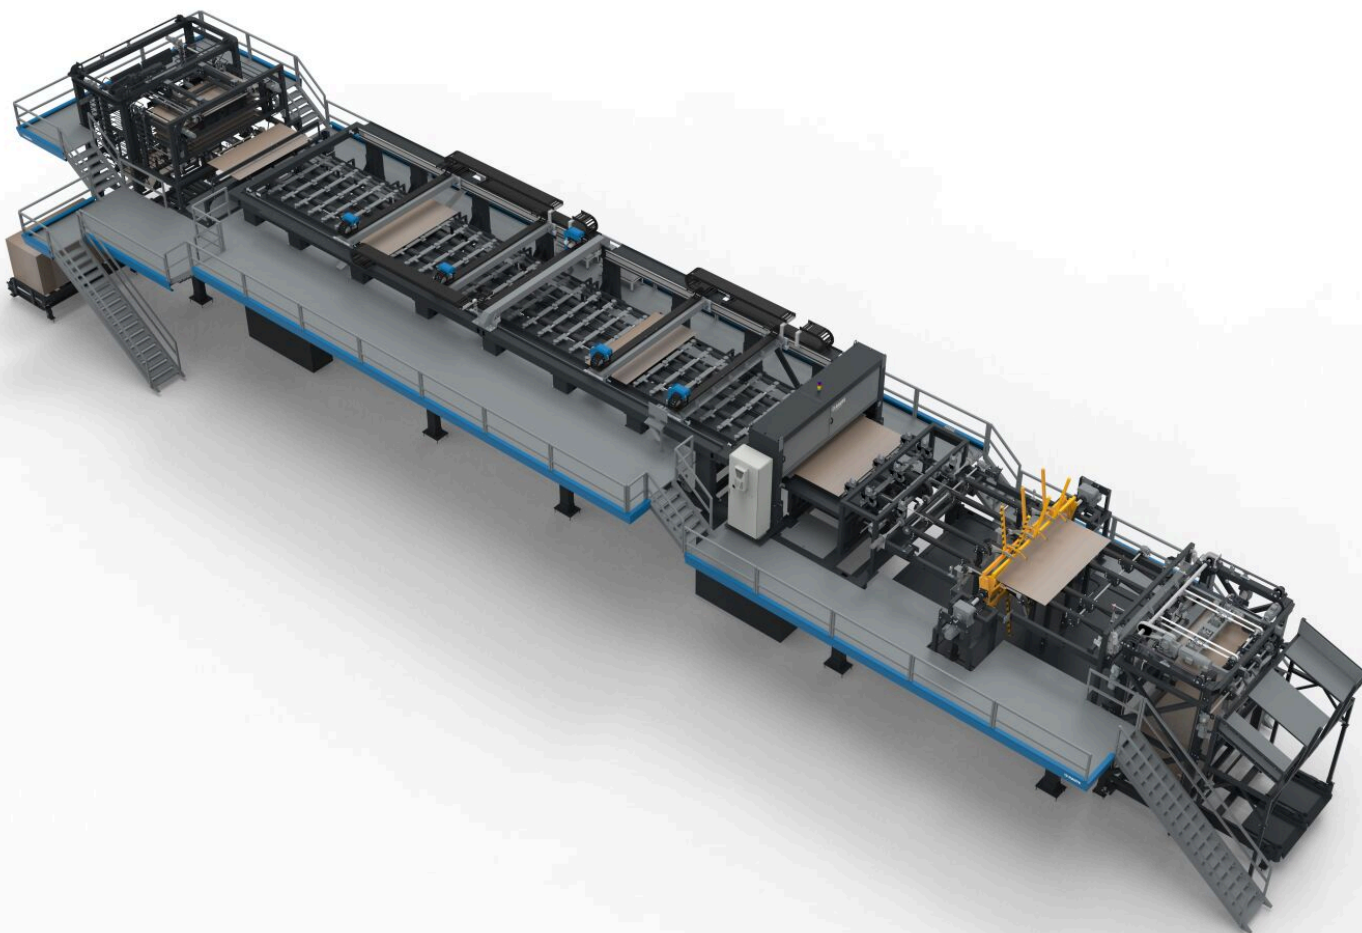

## Uncompromised

Raute Panel Repairing Line R7 is the uncompromised panel repairing solution for most demanding needs. This line has the superior capacity and it can handle trimmed or untrimmed panels. Capacity is achieved through the combination of technology and the most modern analyzers on the market.

Repair technology allows the panel flow to be continuous, even 24/7, and the panels are repaired on the move. Multiple repair heads enable the usage of different repair materials and repair tools even on the same panel.

65% repair material saving is achieved by analyzing each panel surface carefully. Each panel is scanned and the repair of the defects found is optimized so that no over or under filling takes place.


Panel Repairing Line R7 is automatically controlled and monitored all the time and your production data is available in the industry's leading data capturing tool, MILLSIGHTS.




## Key benefits




HIGH CAPACITY IS  
ACHIEVED BY  
REPAIRING THE  
PANELS WHILE THEY  
ARE MOVING



USES 65% LESS  
REPAIRING  
MATERIALS THAN  
TRADITIONAL  
REPAIRING METHODS



ONE OPERATOR  
NEEDED

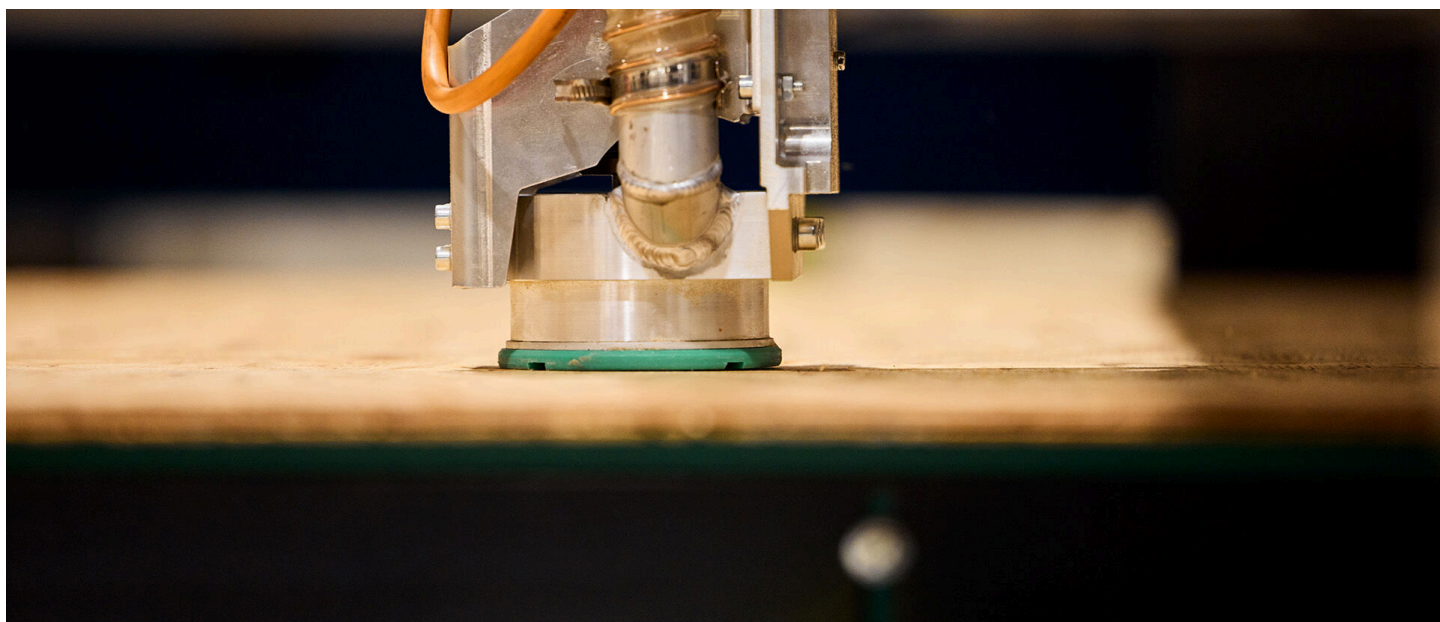



## References





### PotlatchDeltic

PotlatchDeltic is looking forward to achieving its business goals by adopting an automated, data-driven panel repair solution.




[Read more](#)


## Images and videos

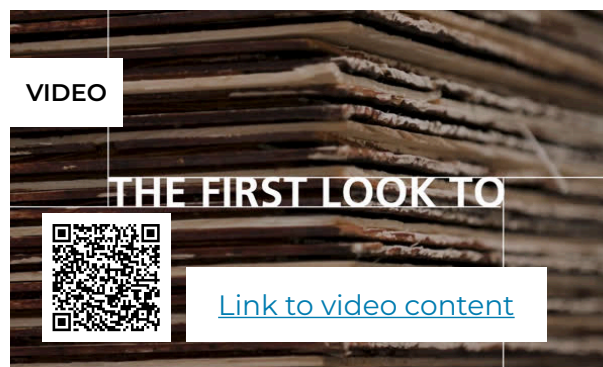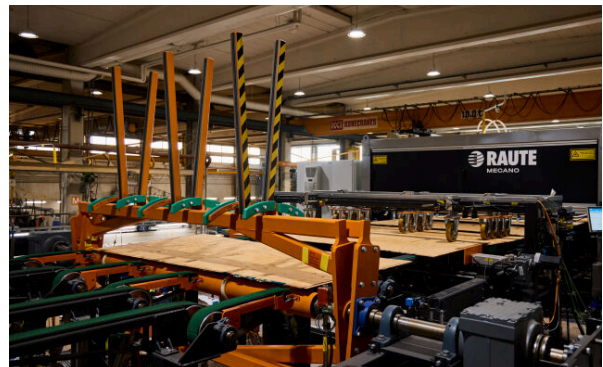


## Downloadable material

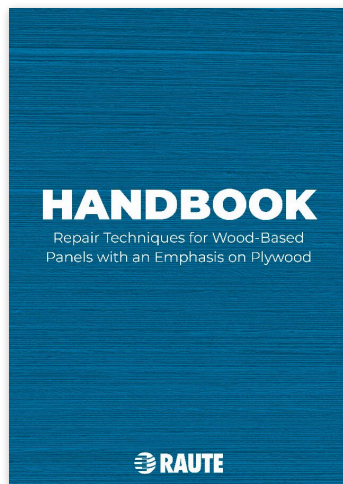

[Download PDF](#)

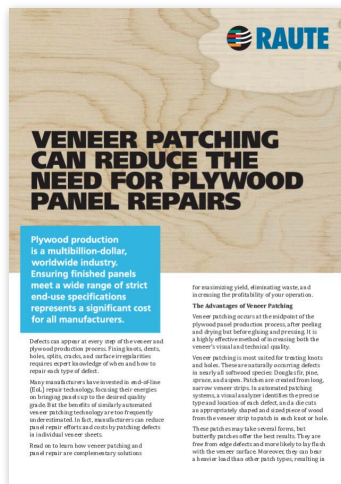

[Download PDF](#)

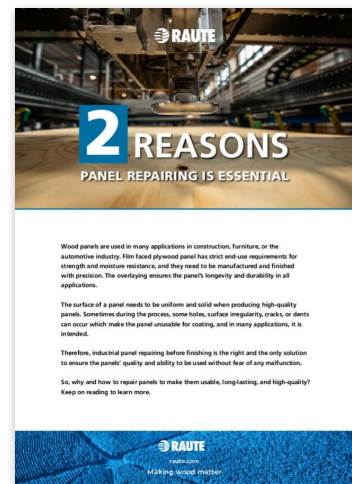

[Download PDF](#)

## Technical specifications

Operators on the Line	1
Minimum Floor space needed (m)	10x30
Panel Thicknesses (mm)	5 - 40
Panel Sizes Variation (ft)	4x4 - 4x8 - 8x13
Repairing Methods	Router-putty-poly
Capacity up to (panels/min)	16

# Panel repairing

## Save time and material with panel repairing

Panel repairing means fixing defects after the panel has been made. Repairing the panel is done because some defects cannot be repaired before the panel is formed. By repairing these defects, the end quality of the panel is higher meaning better recovery with more valuable production for the whole mill.

Repairing is the last manual heavy process in plywood production. It is hard to get people to do manual repairing as it is very unergonomic and difficult to make consistently according to the quality rules. By automating the repair process, it is possible to reduce work-related injuries and sick leaves.

Putty and synthetic repair chemicals have taken major development steps recently as repair materials. Chemical, visual, and mechanical properties suit better for repairing with or without overlaying.

In many applications, one-component putty replaces two-component materials. This means ease of use and material savings in production.

Raute has developed three new solutions for panel repairing which are based on the recent improvements in machine vision analyzing capabilities and high-speed motion control. These improvements result in breakthroughs in capacity, and quality and reduce the usage of repairing material. The solutions make uniform quality on a 24/7 basis. Raute's panel repairing solutions are for any type of wood panels – from plywood to solid wood panels.

**Panel Repair Station R5** is the compact solution for starting the automated repairing or adding capacity with an easy investment. The station fits into the same space as the traditional manual repair cell would and it doesn't require special foundations.

**Panel Repairing Line R5** is the newest addition to the product family. It is designed for repairing solid wood panels in a continuous line, where both panel sides can be repaired automatically, without taking them out of the line. The line is compact and thus usually fits into the place reserved for manual repair, and it needs only one supervising operator.

**Panel Repairing Line R7** brings uncompromised capacity for the most demanding needs. The line can handle trimmed and untrimmed panels and repairs them on the move. Typically, the whole mill production is run through this line.



raute.com

Making Wood Matter