


# Veneer Drying Line R7

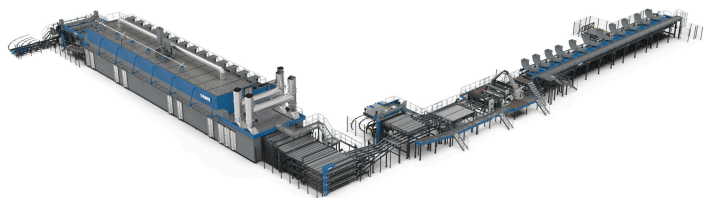

## BENEFITS

- Save 15% in energy consumption/m<sup>3</sup> produced veneer
- Increase drying capacity by 10%
- Zero emissions of VOC is achieved with R7-series dryers
- Just one operator is needed to run this drying line

## TECHNICAL DETAILS

|   |         |
|---|---------|
| Veneer thickness (mm)                                   | 0,6 - 4 |
| Heat Energy Consumption (KWh/m <sup>3</sup> Dry Veneer) | 400     |
| Stainless Steel Skins                                   | ●       |
| Drying Time (min)*                                      | 2.89    |
| Make-up Air Valves                                      | ●       |
| Smoke extraction cells                                  | ●       |
| Sealant cells   | ●       |
| Optimized heating system                                | ●       |
| Exhaust Air Blower                                      | ●       |
| Misting System  | ●       |
| Dry veneer capacity* up to (m <sup>3</sup> /h)          | 13,6    |
| Installed power (kW)                                    | 595     |
| Operators on the Line (Minimum)                         | 1       |