


Veneer Peeling Line R7

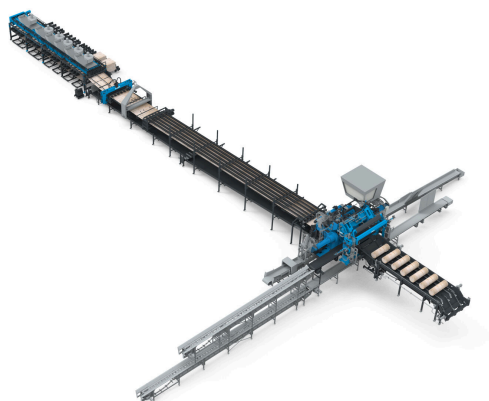


BENEFITS

- Proper peeling increases drying capacity up to 20%
- Produce up to 20% more face veneer
- Only one operator needed
- Flexibility for peeling varied veneer thicknesses, block lengths and raw materials
- Optimal peeling geometry ensures high quality throughout each ribbon

TECHNICAL DETAILS

	R7-5ft	R7-8ft
Veneer thickness (mm)	0,5 – 4,2	0,5 – 4,2
Block Diameter (mm)	140 - 600	160 - 800
Minimum Core Diameter (mm)	55	75
Peeling Speed Up to (m/min)	350	350
Block Centering	Block Centering Analyzer R7	Block Centering Analyzer R7
Peeling Method	With Spindles	With Spindles
Knife Change	Manual	Manual
Operators on the Line	1	1
Capacity up to (m3/h)	12	40
Block Cycle time up to (pcs)	15	15
Block length nom. (ft)	3-5	6-8

Fixed Nose Bar / Pressure Bar		
Powered Roller Bar		
Number of Spindles	2	3
Installed power (kW)	540	800